

## 广东华实照明科技有限公司

**Guangdong Huashi Lighting Technology Co., Ltd** 

## **Outdoor lighting supermarket**






我们聚焦整个行业供需链条的生产端,投入巨资在产品开发验证,实验检测设备、自动化生产设备、流水线创新等工业生产必备要素,首家把LED 照明灯具和机械自动化生产设备同步开发结合一体,更有效控制产品和设备匹配精准度,进而控制产品质量、提高生产效率、降低运营成本。

We focus on the production end of the supply and demand chain of the entire industry, and invest heavily in product development and verification, experimental testing equipment, automated production equipment, assembly line innovation and other necessary elements of industrial production.





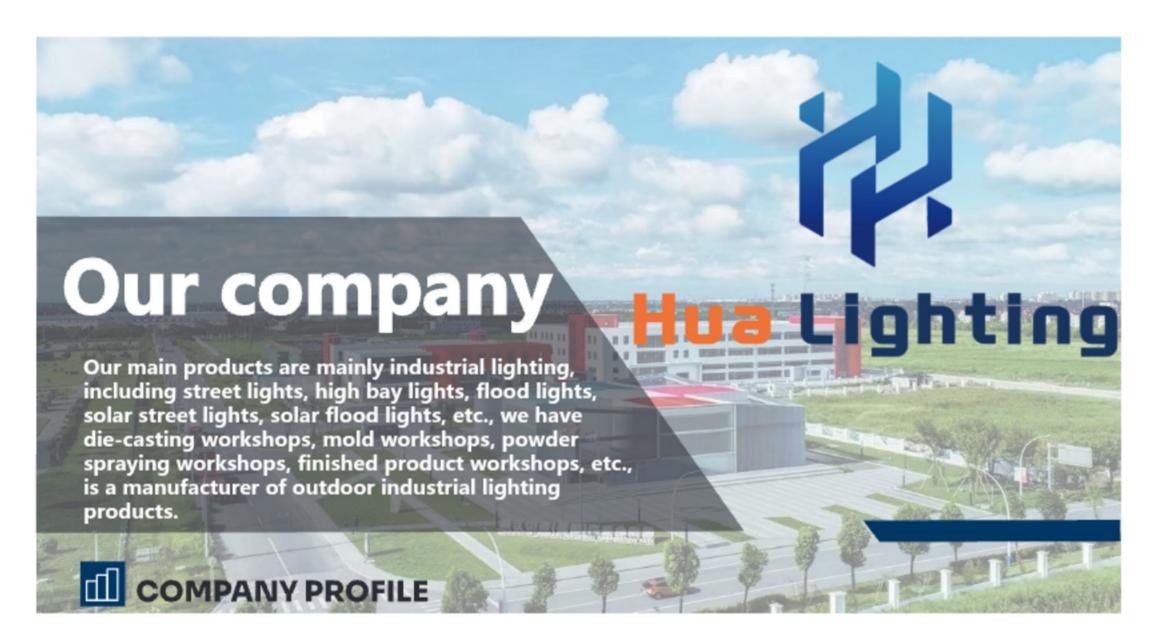

Our production base is located in Zhongshan, Guangdong, covering an area of more than 30 acres, with a total number of about 400 employees, and about 50 professional engineers. The company has advanced professional production equipment and professional technical team, opened up the upstream and downstream lighting industry chain, achieved the ultimate cost performance, and is committed to providing customers with high-quality, high-performance, cost-effective industrial lighting products































## **Design Refinement**

We pursue fashion trends, and with our core design and mold development capability, we have successfully created the value of the brand, and the structure of lamps. Over more than, we focus on the application of LED light sources, our R&D ability is more advanced in LED industry. We repeating rigorous and experimental tests, we undergone strict and thorough inspections from appearance aesthetics, light efficiency, heat dissipation structure, electrical standard to the convenient and safe installation, just strive to make every pieces goods perfect in design and structure.







Multifunctional exhibition hall

More than 100 patents











Automatic aging line

Integrating sphere

Environmental testing

IES detection

Crash test





Mass production

## **CONTACT US**

Address: Area A, 3rd Floor, North Building No. 1, Yuxing Industrial Park, Yanjiang East Road, Torch Development Zone, Zhongshan City, Guangdong, China.

TEL: +86 18922770309

Website: https://hualights.com E-mail: info@hualights.com


























## Place available

Use International well-known brand driver The lamp body is adjustable, aiming at any object that needs to be illuminated, unaffected by climate conditions



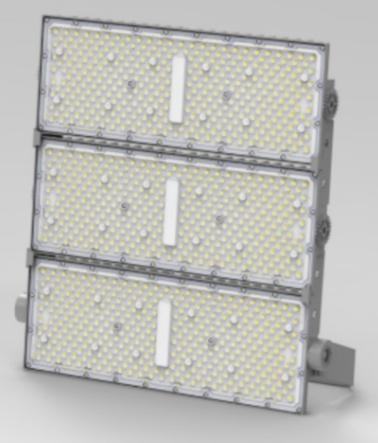





Modular-A 200W

Modular-B 200W

#### Flood Light 连云F 200W模组


ISO CB (€ 🛫 🛕 IP65 👑



















- Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case.excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- · anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
200W	150lm/W	> 0.9	AC100-277V	436*83*226mm
400W	150lm/W	> 0.9	AC100-277V	436*83*391mm
600W	150lm/W	> 0.9	AC100-277V	436*86*555mm
800W	150lm/W	> 0.9	AC100-277V	449*86*755mm
1000W	150lm/W	> 0.9	AC100-277V	449*86*920mm
		1		









Flood Light



## You can DIY!!

## Place available

Use International well-known brand driver The lamp body is adjustable, aiming at any object that needs to be illuminated, unaffected by climate conditions









Modular-A


Modular-B



200W

#### Flood Light 连云F 100W模组 HLF-002

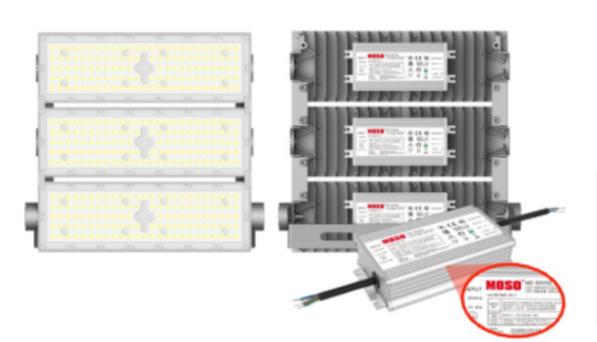



















Der (H)	Englin (Ik)
on A	+1.85
iom /	10,46
iam (	4.551
esen (	2.616
sno (	1.674

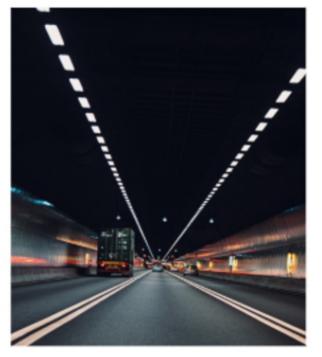

- Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case.excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- · anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

150lm/W			
I DOIIII/ VV	> 0.9	AC100-277V	337°79*155mm
150lm/W	> 0.9	AC100-277V	337*79*260mm
150lm/W	> 0.9	AC100-277V	337*79*364mm
150lm/W	> 0.9	AC100-277V	337*79*471mm
150lm/W	> 0.9	AC100-277V	337*79*576mm
150lm/W	> 0.9	AC100-277V	337*79*680mm
150lm/W	> 0.9	AC100-277V	644*79*337mm
150lm/W	> 0.9	AC100-277V	644*79*482mm
150lm/W	> 0.9	AC100-277V	665*79*624mm
150lm/W	> 0.9	AC100-277V	665*79*728mm
150lm/W	> 0.9	AC100-277V	665*79*937mm
150lm/W	> 0.9	AC100-277V	665*79*1042mm
150lm/W	> 0.9	AC100-277V	665*79*1146mm
	150lm/W 150lm/W 150lm/W 150lm/W 150lm/W 150lm/W 150lm/W 150lm/W 150lm/W 150lm/W	150lm/W > 0.9 150lm/W > 0.9	150lm/W > 0.9 AC100-277V 150lm/W > 0.9 AC100-277V





#### Flood Light 连云G




#### HLF-003











- Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- · anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
150W	150lm/W	> 0.9	AC100-277V	281*73*207
200W	150lm/W	> 0.9	AC100-277V	281*73*286
250W	150lm/W	> 0.9	AC100-277V	281*73*365
300W	150Im/W	> 0.9	AC100-277V	281*73*444
400W	150lm/W	> 0.9	AC100-277V	522*92*372
500W	150lm/W	> 0.9	AC100-277V	522*92*451
600W	150lm/W	> 0.9	AC100-277V	522*102*53





PILIN)	Boodrija)
um A	+1.85
ion /	19,46
0m	4.51
Om /	2/16
im (	1,674

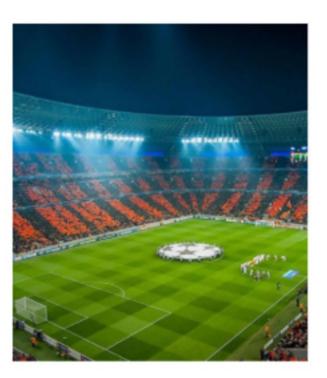


Ultrathin

design

Ultra thin integrated design for more compact and

excellent exposure reduction of lighting fixtures










- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
10W	100lm/W	>0.9	AC100-265V	130*25*100
20W	100lm/W	>0.9	AC100-265V	150*25*130
30W	100lm/W	>0.9	AC100-265V	162*25*135
50W	100lm/W	>0.9	AC100-265V	190*25*165
100W	100lm/W	>0.9	AC100-265V	230*25*195
150W	100lm/W	>0.9	AC100-265V	255*25*210
200W	100lm/W	>0.9	AC100-265V	315*25*220
300W	100lm/W	>0.9	AC100-265V	420*25*360
400W	100lm/W	>0.9	AC100-265V	485*30*455
500W	100lm/W	>0.9	AC100-265V	570*25*398
600W	100lm/W	>0.9	AC100-265V	570*25*460





Da (M)	Brasin (b)
nn A	1.900
Im /	3580
òn (	11:514
300	0.542
an (	0,510



- li		***	*****	*****	1
l.	_			(0.000)	1
			-	-	
					٥



# Ultrathin design

Ultra thin integrated design for more compact and excellent exposure reduction of lighting fixtures




#### Flood Light 金苹果



#### HLF-005










## Flood Light


- Integrated cooling design, elegant, efficient
  Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future


Wattage	Luminous	Power factor	Voltage	Size
50W	110lm/W	>0.9	AC100-265V	195*24*153
100W	110lm/W	>0.9	AC100-265V	235*27*195
150W	110lm/W	>0.9	AC100-265V	295*27*233
200W	110lm/W	>0.9	AC100-265V	358*27*27
300W	110lm/W	>0.9	AC100-265V	385*27*32





rt (N)	Bradir (h)
т Д	1.700
m /	0.926
m ()	0.044
m /	0.592
m (	0.510

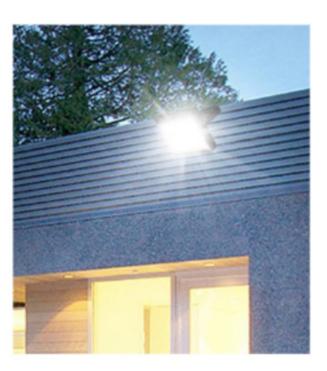

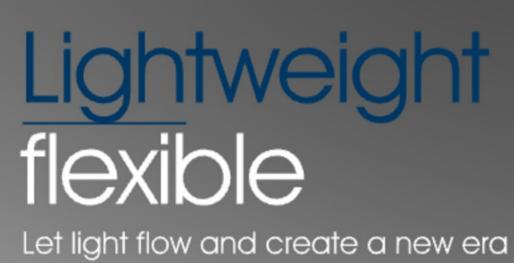

Let light flow and create a new erd of healthy lighting



#### Flood Light 星联C



#### HLF-006

















- Integrated cooling design, elegant, efficient
  Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Lurningus	Power factor	Voltage	Size
200W	80lm/W	>0.9	AC100-265V	355*292*55
300W	80lm/W	>0.9	AC100-265V	455*350*55
400W	80lm/W	>0.9	AC100-265V	530*350*59
500W	80lm/W	>0.9	AC100-265V	610*350*6
600W	80lm/W	>0.9	AC100-265V	715*355*6
1000W	80lm/W	>0.9	AC100-265V	960*355*60






HLF-007

Flood Light 星耀











## Flood Light

- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- · anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
50W	110lm/W	>0.9	AC85-305V	272*230*45
100W	110lm/W	>0.9	AC85-305V	272*318*50
150W	110lm/W	>0.9	AC85-305V	285*343*55
200W	110lm/W	>0.9	AC85-305V	350*415*60
300W	110lm/W	>0.9	AC85-305V	405*480*60
400W	110lm/W	>0.9	AC85-305V	485*505*60












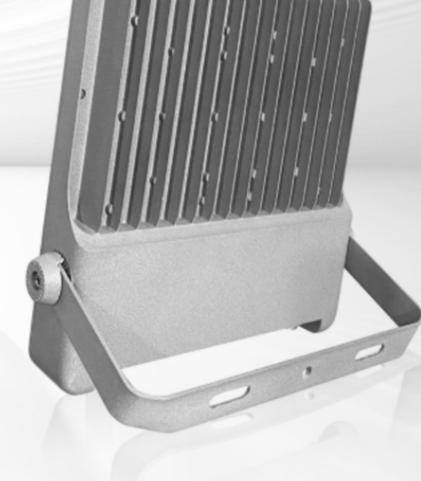




#### Flood Light 星程



HLF-008



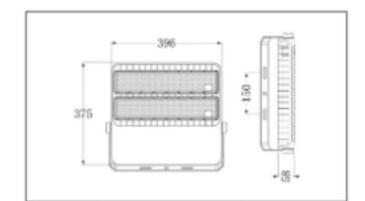





- Integrated cooling design, elegant, efficient
  Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
100W	110lm/W	>0.9	AC85-305V	396*249*58
200W	110lm/W	>0.9	AC85-305V	396*376*58
300W	110lm/W	>0.9	AC85-305V	496*396*60
400W	110lm/W	>0.9	AC85-305V	615*396*60

