

广东华实照明科技有限公司

Guangdong Huashi Lighting Technology Co., Ltd

Outdoor lighting supermarket





我们聚焦整个行业供需链条的生产端,投入巨资在产品开发验证,实验检测设备、自动化生产设备、流水线创新等工业生产必备要素,首家把LED照明灯具和机械自动化生产设备同步开发结合一体,更有效控制产品和设备匹配精准度,进而控制产品质量、提高生产效率、降低运营成本

We focus on the production end of the supply and demand chain of the entire industry, and invest heavily in product development and verification, experimental testing equipment, automated production equipment, assembly line innovation and other necessary elements of industrial production.









Our production base is located in Zhongshan, Guangdong, covering an area of more than 30 acres, with a total number of about 400 employees, and about 50 professional engineers. The company has advanced professional production equipment and professional technical team, opened up the upstream and downstream lighting industry chain, achieved the ultimate cost performance, and is committed to providing customers with high-quality, high-performance, cost-effective industrial lighting products

















ISO9001 CE ROHS CB FC FO NOM I















Design Refinement

We pursue fashion trends, and with our core design and mold development capability, we have successfully created the value of the brand, and the structure of lamps. Over more than, we focus on the application of LED light sources, our R&D ability is more advanced in LED industry. We repeating rigorous and experimental tests, we undergone strict and thorough inspections from appearance aesthetics, light efficiency, heat dissipation structure, electrical standard to the convenient and safe installation, just strive to make every pieces goods perfect in design and structure.







Multifunctional exhibition hall

More than 100 patents











Automatic aging line

Integrating sphere

Environmental testing

IES detection

Crash test







CONTACT US

Address: Area A, 3rd Floor, North Building No. 1, Yuxing Industrial Park, Yanjiang East Road, Torch Development Zone, Zhongshan City, Guangdong, China.

TEL: +86 18922770309 Website: https://hualights.com E-mail: info@hualights.com










Street Light 飞渡



HLS-001









- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation
- Durable outdoor painting process of the product, excellent quality. anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
100W	140lm/W	>0.9	AC100-277V	429*300*138
150W	140lm/W	>0.9	AC100-277V	429*300*138
200W	140lm/W	>0.9	AC100-277V	523*300*139
250W	140lm/W	>0.9	AC100-277V	523*300*139
300W	140lm/W	>0.9	AC100-277V	589*302*146
400W	140lm/W	>0.9	AC100-277V	625*335*180



1-	and and	450.2	1	= 1-
1	X	900.3		\bigcirc
14	7	1000.6	-	
	-30	2250-6		30
	7.FGan 00.0 189.9 .	Isonau.	1912	ona)

Dist. 17Tg	Enatir (h)
Iam A	1950
IIm j	0.926
1211	0.594
ISm /	0 592
1+m [0.515










Street Light协和





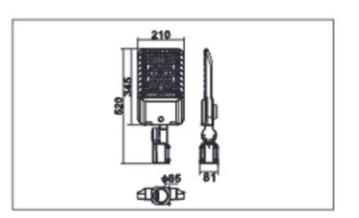









- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case.excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- · anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
100W	150lm/W	>0.9	AC100-277V	520*210*81
150W	150lm/W	>0.9	AC100-277V	565*250*81
200W	150lm/W	>0.9	AC100-277V	590*280*81
300W	150lm/W	>0.9	AC100-277V	675*300*85
400W	150lm/W	>0.9	AC100-277V	725*342*90



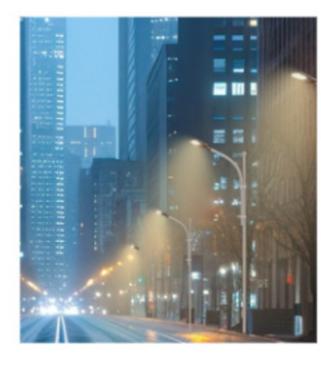






Street Light天鹅B















- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

		Voltage	Size
150lm/W	>0.9	AC100-277V	585*210*103
150lm/W	>0.9	AC100-277V	605*265*103
150lm/W	>0.9	AC100-277V	707*265*103
150lm/W	>0.9	AC100-277V	760*280*103
	150lm/W 150lm/W	150lm/W >0.9 150lm/W >0.9	150lm/W >0.9 AC100-277V 150lm/W >0.9 AC100-277V


















Street Light 飞驰









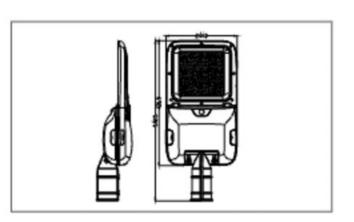







- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future


Wattage	Luminous	Power factor	Voltage
100W	150lm/W	>0.9	AC100-277V
150W	150lm/W	>0.9	AC100-277V
200W	150lm/W	>0.9	AC100-277V
300W	150lm/W	>0.9	AC100-277V



















Street Light云皓


ISO CB (€ 🗹 🛦 IP65 🐷





HLS-005









- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- · anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future


150lm/W	>0.9	ACRE COEV	1
	7 0.0	AC85-305V	408*220*82
150lm/W	>0.9	AC85-305V	479*250*82
150lm/W	>0.9	AC85-305V	545*290*92
		200000000000000000000000000000000000000	


















Street Light云皓B


ISO CB (€ 🛫 🛕 IP65 🐷





HLS-006











- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation
- Durable outdoor painting process of the product, excellent quality.
- anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
50W	150lm/W	>0.9	AC85-305V	446*224*80
100W	150lm/W	>0.9	AC85-305V	466*240*80
150W	150lm/W	>0.9	AC85-305V	552*291*80





Nic (M)	Envir (N)
um A	1.006
Im /	0.925
ð" /	0,694
im [0.592
h-	0510

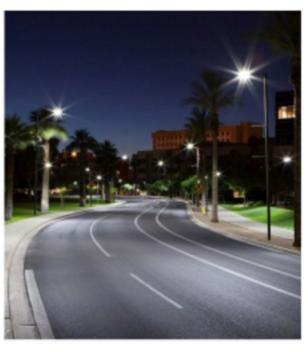




Street Light云皓C

ISO CB (€ 🚣 🛕 IP65 🐷



HLS-007












- Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- · anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
50W	150lm/W	>0.9	AC85-305V	452*220*77
100W	150lm/W	>0.9	AC85-305V	496*224*80
150W	150lm/W	>0.9	AC85-305V	590*300*80














Street Light飞挚

















- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
50W	150lm/W	>0.9	AC85-305V	470*206*70
100W	150lm/W	>0.9	AC85-305V	520*232*76
150W	150lm/W	>0.9	AC85-305V	584*279*76
200W	150lm/W	>0.9	AC85-305V	675*314*82
300W	150lm/W	>0.9	AC85-305V	759*359*82



1	
#71 - 15 All 16 A - 15 All 16 A - 15 All 16 A - 15 All 16 A	PATERIOR WARD MADE OF LAST 1: 100. K Let












Street Light菱形



HLS-009











- Integrated cooling design, elegant, efficient
 Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- anti-comosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
30W	150lm/W	>0.9	AC85-305V	280*135*70
50W	150lm/W	>0.9	AC85-305V	425*180*80
100W	150lm/W	>0.9	AC85-305V	505*215*80
150W	150lm/W	>0.9	AC85-305V	600*235*85
200W	150lm/W	>0.9	AC85-305V	655*245*85
250W	150lm/W	>0.9	AC85-305V	815*305*90
300W	150lm/W	>0.9	AC85-305V	815*305*90
















Street Light云际





HLS-010










- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case.excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- · anti-comosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
50W	150lm/W	>0.9	AC85-305V	415*220*80
100W	150lm/W	>0.9	AC85-305V	486*250*80
150W	150lm/W	>0.9	AC85-305V	558*291*80





19m A	000,1
IIm	0026
ram (0,444
13m /	0.592
19m	0510






Street Light 飞鹰

ISO CB (€ 🛫 🛕 IP65 🐷














- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Wattage	Luminous	Power factor	Voltage	Size
50W	150lm/W	>0.9	AC85-305V	470*196*80
100W	150lm/W	>0.9	AC85-305V	545*210*85
150W	150lm/W	>0.9	AC85-305V	670*290*10





Dru rMJ	Gnatir / lx
ion A	1.050.1
IIm /	9.974
1211	0.544
13m	0,592
I-lm	n.si o






Street Light 飞雕


ISO CB (€ 🚣 🛕 IP65 🐷

HLS-012



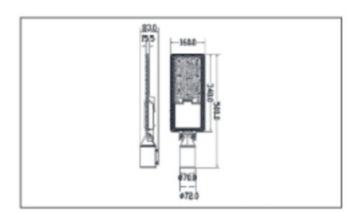







- Integrated cooling design, elegant, efficient.
 Streamline design, beautiful appearance, no accumulation.
- Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
- anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Luminous	Power factor	Voltage	Size
150lm/W	>0.9	AC85-305V	500*160*83
150lm/W	>0.9	AC85-305V	640*214*84
150lm/W	>0.9	AC85-305V	680*256*83
150lm/W	>0.9	AC85-305V	785*260*83
	150lm/W 150lm/W 150lm/W	150lm/W >0.9 150lm/W >0.9 150lm/W >0.9	150lm/W >0.9 AC85-305V 150lm/W >0.9 AC85-305V 150lm/W >0.9 AC85-305V












Street Light飞行

ISO CB (€ 🚣 🛕 IP65 👑

HLS-013












- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product excellent quality.
- anti-conosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

	W/ml00	>0.9	AC100-265V	445*113*75
100W 1	001 044			
	00lm/W	>0.9	AC100-265V	500*128*75
150W 1	00lm/W	>0.9	AC100-265V	565*164*75
200W 1	100lm/W	>0.9	AC100-265V	685*196*75







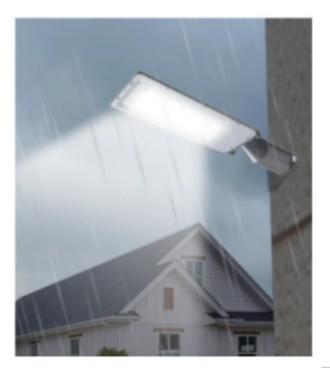





Street Light扇形








HLS-014









- ◆ Integrated cooling design, elegant, efficient Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- Durable outdoor painting process of the product, excellent quality.
 anti-corrosion and anti-rusting performance, widely used in different
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

Luminous	Power factor	Voltage	Size
150lm/W	>0.9	AC85-305V	560*203*80
150lm/W	>0.9	AC85-305V	560*208*80
150lm/W	>0.9	AC85-305V	670*215*80
150lm/W	>0.9	AC85-305V	725*240*80
	150lm/W 150lm/W 150lm/W	150lm/W >0.9 150lm/W >0.9 150lm/W >0.9	150lm/W >0.9 AC85-305V 150lm/W >0.9 AC85-305V 150lm/W >0.9 AC85-305V



